


Tuesday, 30.April 2013



Free running impeller
With backward curved 7-blade aluminium
high efficiency impeller

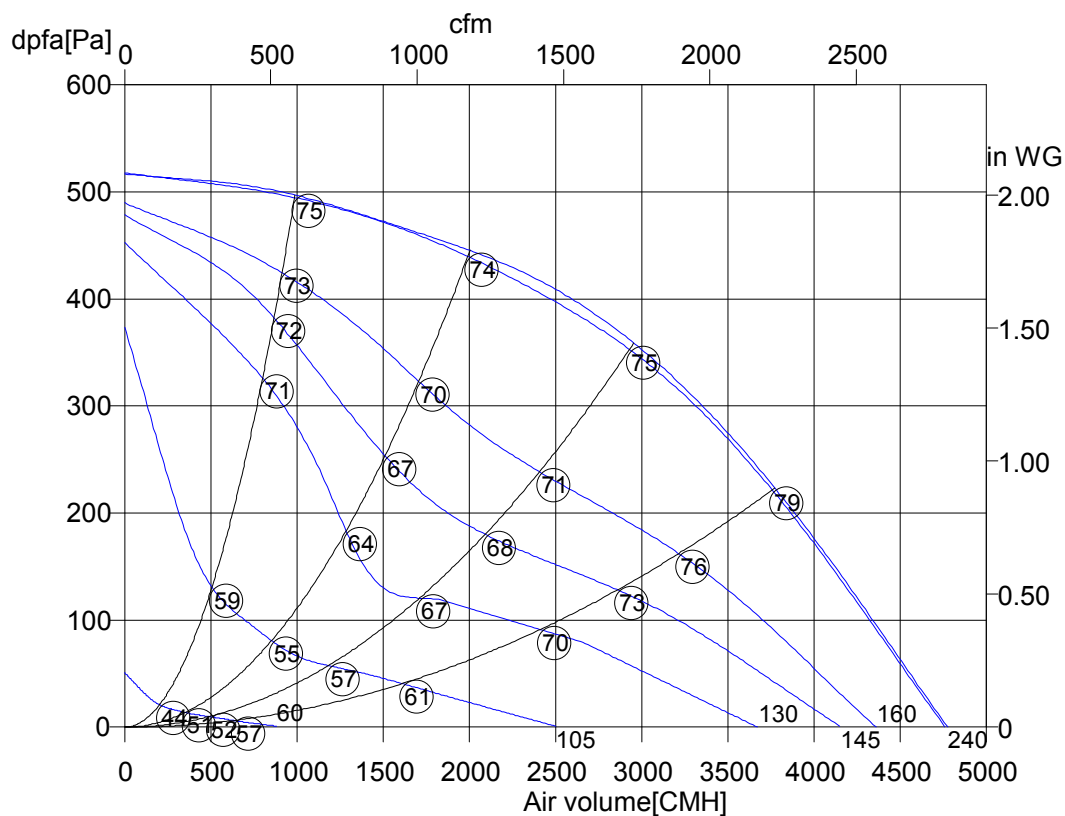

EKH_400-4_B125.5HA

Art. No.	
U[V]	230
f[Hz]	50
P[kW]	0.64
I[A]	2.9
n[1/min]	1375
C[μF]	12.
tR[°C]	45
dpst[Pa]	-
Delta I[%]	-
Ia/In	2.7
IP	54
Weight[kG]	11.3
Wir. diagr.	01.024

Octave sound power level

f[Hz]	125	250	500	1000	2000	4000	8000
LwA8[dBA]:	-16	-9	-6	-5	-6	-13	-21
LwA6[dBA]:	-19	-12	-9	-8	-9	-16	-24
LwA5[dBA]:	-25	-15	-12	-12	-12	-17	-22

Tuesday, 30.April 2013



Free running impeller
With backward curved 7-blade aluminium
high efficiency impeller

EKH_400-4_B125.5HA

No drawing available

Tuesday, 30.April 2013

Pos.	Pieces	Description	Price
		<p>Rosenberg radial fans with free-running impeller -KH- series</p> <p>The single inlet, backward curved high efficiency impeller from sea-waterproof aluminium, mounted onto the speed controllable external rotor motor, equipped with an air flow optimized inlet cone from galvanized sheet steel. The impeller can be supplied as single unit or as a complete module of galvanized sheet steel.</p> <p>The fan is balanced on two levels according to quality class G 2.5, DIN/ISO 1940.</p> <p>Closed motor, protection class IP 44/54 with protection against humidity and thermal contacts wired in windings for motor protection. Maintenance free ball bearings, closed on both sides, sealed for life. Electrical connection through terminal box (not connected) in IP 44.</p> <p>Documentation : Declaration of incorporation and operating instruction are according to Machinery Directive 2006/42/EC, CE identification in accordance to EMC-directive 2004/108/EC and Low Voltage Directive 2006/95/EC. Motor operating instruction is available from motor manufacturer.</p> 	

Tuesday, 30. April 2013



Free running impeller

With backward curved 7-blade aluminium
high efficiency impeller


EKH_400-4_B125.5HA

Einphasenwechselstrommotor mit Betriebskondensator und Thermostatschalter.
Bei Verwendung von RE Steuergeräten TB mit der Wicklung in Reihe schalten.
Hierfür Brücke (x) einlegen und gestrichelt gezeichnete Anschlüsse belegen.

Single phase A.C. motor with operating capacitor and thermostatic switch.
Thermostatic switch wired in series with windings if RE controllers are used.
Insert bridge (x) and wire connections shown as dash-line on the drawing.

**Moteur monophasé avec condensateur permanent et interrupteur thermo-
statique branché en série avec le bobinage en cas de branchement avec des
régulateurs RE. Mettre un pont (x) et brancher toutes les connexions
dessinées en hachuré.**

Rechtslauf
clockwise
rotation horaire

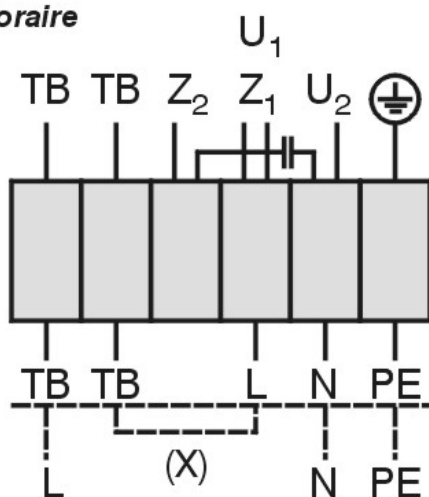

U₁ braun / brown / brun
U₂ blau / blue / bleu
Z₁ schwarz / black / noir
Z₂ orange / orange / orange

TB weiß / white / blanc
PE gelb-grün
yellow-green
jaune-vert

01.024

TK3-20010