
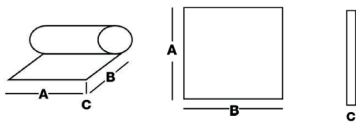


ROLL AND CUT PADS

Roll Filters

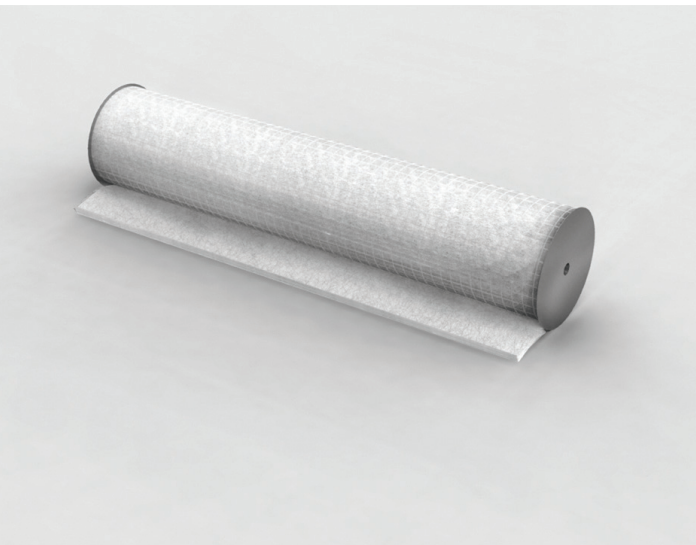

Barcode
Description
Width A (mm)
Length B (m)
Thickness C (mm)
Media area (m²)
Flow rate (m³/h)/
Delta P (Pa)

G3 - ISO COARSE 50% ISO 16890

1500034	FD 3'/A	836	20	50	16,7	9000 / 45
1500032	FD 3'/T	860	20	50	17,2	9000 / 45
1500035	FD 4'/A	1141	20	50	22,8	9000 / 45
1500039	FD 4'/T	1160	20	50	23,2	9000 / 45
1500007	FD 4'/D	1110	20	50	22,2	9000 / 45
1500036	FD 5'/A	1446	20	50	28,9	9000 / 45
1500027	FD 5'/T	1460	20	50	29,2	9000 / 45
1500008	FD 5'/D	1410	20	50	28,2	9000 / 45
1500037	FD 6'/A	1751	20	50	35,0	9000 / 45
1500028	FD 6'/T	1760	20	50	35,2	9000 / 45
1500009	FD 6'/F	1710	20	50	34,2	9000 / 45
1500038	FD 7'/A	2056	20	50	41,1	9000 / 45
1500029	FD 7'/T	2060	20	50	41,2	9000 / 45
1500010	FD 7'/F	2010	20	50	40,2	9000 / 45



Tip Bonded fibers on clean air side makes the assembling easier and increases the mechanical resistance of the media.

APPLICATIONS

Primary filtration for air treatment in industrial ventilation units.

ADVANTAGES

- Complete range of refills compatible with major brands (AAF's Roll-o-Mat, Trox's Trox-o-Mat, Delbag's Fibroband, among others)
- Progressive density
- Increased dust retention capacity, thanks to the application of a physiological binder
- Auto rolls are available in different widths

GENERAL FEATURES

- Efficiency EN779: G3
- Media: Fiberglass or synthetic
- Final pressure drop: 180 Pa
- Maximum T° in continuous service: 120°C
- Humidity: 100% RH