



ROLLS AND CUT PADS

Andreae

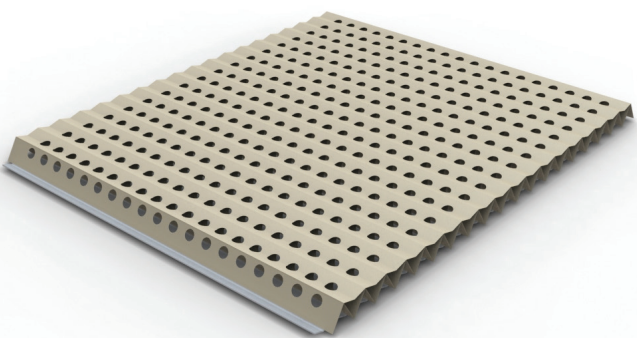

Width A (mm)	Length B (m)	Media area (m ²)	Flow rate (m ³ /h)/ Delta P (Pa)	Flow rate (m ³ /h)/ Delta P (Pa)	Dust holding capacity (kg/m ²)
STD					
750	13400	10	1800 / 20	3600 / 40	18
900	9300	8,35	1800 / 20	3600 / 40	18
900	11100	10	1800 / 20	3600 / 40	18
1000	10000	10	1800 / 20	3600 / 40	18
750	10700	8	1800 / 21	3600 / 42	28
900	8900	8	1800 / 21	3600 / 42	28
1000	8000	8	1800 / 21	3600 / 42	28
750	10700	8	1800 / 21	3600 / 42	20
900	8900	8	1800 / 21	3600 / 42	20
1000	8000	8	1800 / 21	3600 / 42	20
750	10000	8	1800 / 21	3600 / 42	29
900	10000	8	1800 / 21	3600 / 42	29
1000	10000	8	1800 / 21	3600 / 42	29
750	13400	10	1800 / 20	3600 / 40	18
900	9300	8,35	1800 / 20	3600 / 40	18
900	11100	10	1800 / 20	3600 / 40	18
1000	10000	10	1800 / 20	3600 / 40	18

Tip Pay attention to the air passage speed! The recommended air passage speed: 0,25 to 1 m/s.

APPLICATIONS

ANDREAE filter media were developed in order to stop particles by inertia (paint pigments, coating materials). This media is particularly efficient on dryer and less sticky coating materials, and allows an efficient protection of extraction ducts and ventilation systems.

ADVANTAGES

- Deltrian cutting service
- High retention power
- Also available in high capacity version
- 100% incinerable

GENERAL FEATURES

- Media: 100% cardboard
- Recommended final pressure drop: 128 / max. 256 Pa
- Maximum T° in continuous service: 70°C
- Humidity: 100% RH

Deltrian reserves the right to modify the characteristics of its products without prior notice, as part of its continuous product improvement policy.