




Type: **R 160 G.2BK**
Part no.: F02-16002



Curve:

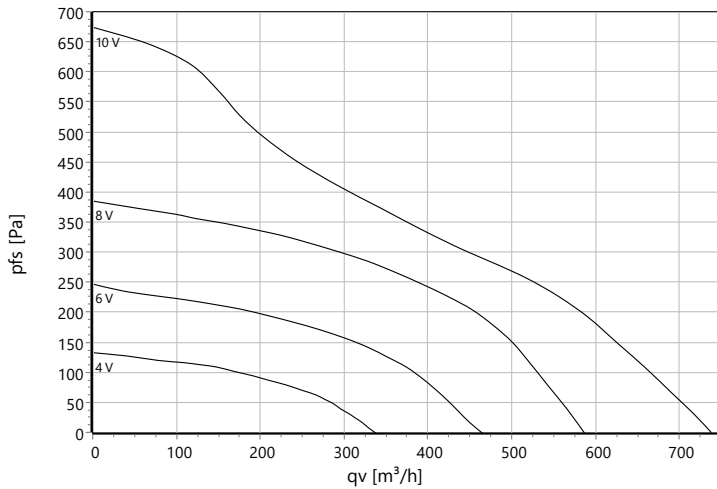

p: 1.15 kg/m³; Data @ 230 V

ErP-Data:

(EU) Nr. 1253/2014	(Lot6)
q _v	457 m³/h
p _{fs}	295 Pa
η _{fs}	42.6 %
P _{ed}	0.0881 kW
n	3262 r/min
N	58
v	6.32 m/s


Nominal Data:

U [V]	f [Hz]	Data @ [V]	P _{ed} [kW]	I _N [A]	n _N [r/min]	t _R [°C]	k ₁₀ [m²s/h]	I _A / I _N	IP	m [kg]
1~200-240	50/60	230	0.089	0.75	3260	-20 .. +60	-	-	IP 54	3.2

Sound Data:

Frequency	Σ	63Hz	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Distances	1 m	3 m
LwA(D,in) [dB(A)]	1	-42	-23	-9	-7	-5	-5	-6	-13	LpA(D,in) [dB(A)]	-6	-13
LwA(D,out) [dB(A)]		-38	-20	-9	-9	-7	-5	-7	-17	LpA(D,out) [dB(A)]	-7	-14
LwA(D,cas) [dB(A)]	-18	-42	-27	-25	-26	-24	-25	-31	-38	LpA(D,cas) [dB(A)]	-25	-32

Wiring Diagram:

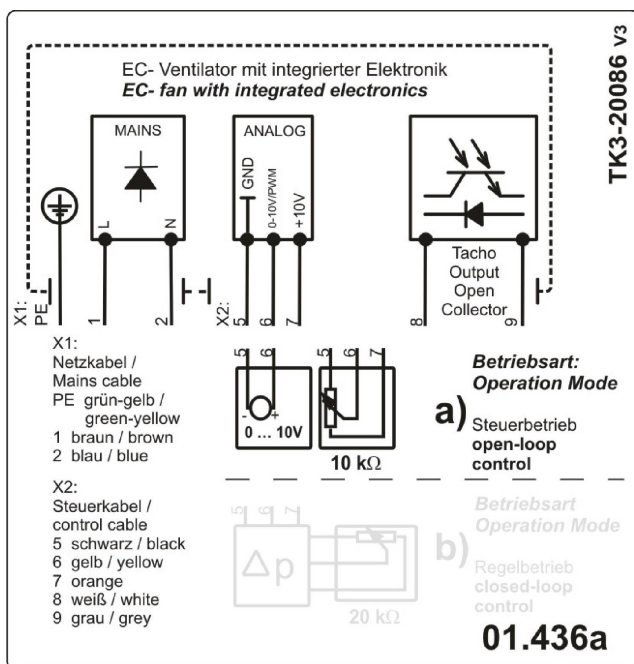

drawing:

