



FILTER CELLS

FZ Carton SC and ES

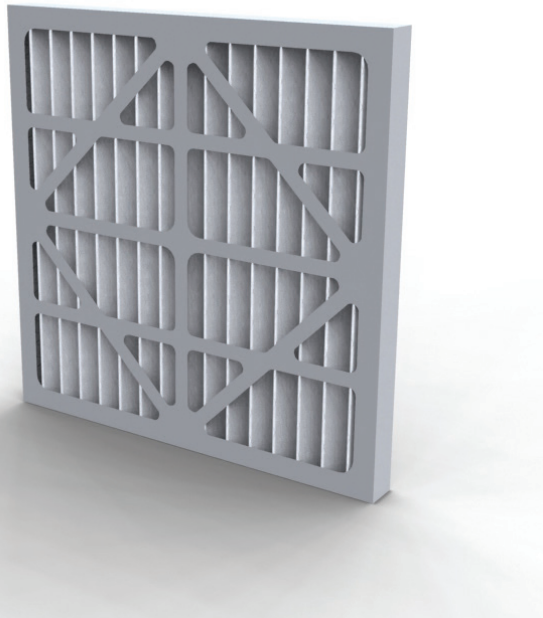

APPLICATIONS

Rough primary filtration for air treatment units.

ADVANTAGES

- Rigid cells with pleats reinforcement holds for larger sizes
- Improved air tightness thanks to sealing resin in the bottom of the frame
- Light filter, rigid and easy to compact
- Moisture resistant cardboard frame
- Grid embedded in frame, bonded to the media
- Comprehensive range of standard sizes; out of standard sizes available upon request
- 100% incinerable
- Tested for food contact according to CE 1935/2004

GENERAL FEATURES

- Efficiency EN779: G4
- Media: Synthetic, pleated on grid
- Frame: Cardboard
- Final pressure drop: 250 Pa
- Maximum T° in continuous service: 70°C
- Humidity: 100% RH

Barcode	Description	Width A (mm)	Height B (mm)	Depth C (mm)	Media area (m ²)	Flow rate (m ³ /h)/ Delta P (Pa)
G4 - ISO COARSE 65% ISO 16890						
0800656	FZ CA SC	595	595	23	0,44	3000 / 100
0802128	FZ CA SC	495	624	23	0,38	2600 / 100
0802126	FZ CA SC	495	595	23	0,36	2500 / 100
0802120	FZ CA SC	395	495	23	0,24	1650 / 100
0802116	FZ CA SC	287	595	23	0,21	1500 / 100
0802587	FZ CA SC	287	287	23	0,10	750 / 100
0800658	FZ CA SC	595	595	47	0,9	3400 / 90
0802129	FZ CA SC	495	624	47	0,78	2975 / 90
0802127	FZ CA SC	495	595	47	0,75	2850 / 90
0800664	FZ CA SC	395	495	47	0,49	1870 / 90
0802117	FZ CA SC	287	595	47	0,43	1700 / 90
0802114	FZ CA SC	287	287	47	0,20	825 / 90
0800590	FZ CA SC	595	595	97	1,85	3400 / 60
0800669	FZ CA SC	495	624	97	1,61	2975 / 60
0800670	FZ CA SC	495	595	97	1,54	2850 / 60
0800829	FZ CA SC	395	595	97	1,23	2325 / 60
0802121	FZ CA SC	395	495	97	0,54	1870 / 60
0802118	FZ CA SC	287	595	97	0,5	1700 / 60
0802115	FZ CA SC	287	287	97	0,26	825 / 60



Tip Reduce your filtration costs by choosing our "GK" series bag filter which offers 2 filtration stages in 1 product.

G4 - ISO COARSE 65% ISO 16890

0823790	FZ CA ES	595	595	47	1,3	3400 / 55
0823800	FZ CA ES	495	495	47	0,9	2800 / 55
0823799	FZ CA ES	395	495	47	0,8	1900 / 55
0823792	FZ CA ES	287	595	47	0,7	1700 / 55
0823791	FZ CA ES	595	595	97	2,2	3400 / 50
0823801	FZ CA ES	495	495	97	1,5	2800 / 50
0823794	FZ CA ES	395	495	97	1,3	1900 / 50
0823793	FZ CA ES	287	595	97	1,2	1700 / 50



Tip Thanks to its low initial pressure drop and its 100% incinerable structure, this filter will perfectly meet your environmental policy requirements.