

# Fan Louvre Shutters

## Automatic Version / Type WSK



- Plastic fan louvre shutter for exhaust ventilation
- Self-adjusting blades
- Outdoor weathering resistant (UV-stabilized)
- Suitable for an operating temperature range of -30°C to +60°C
- Maximum flow velocity 10 m/s for WSK 15 - 65
- Specific design guarantees high durability
- Manufactured of high standard ecologically friendly plastic
- Number of blades varies according to the size of the shutter
- WSK 55 - 85 divided into two parts by a middle strap
- From WSK 90 divided into three parts by middle straps; supplied in three parts for self-assembly
- From WSK 70 all louvre shutters are equipped with an elongated hole to fasten it on the wall (see also pic. 6, page 30)




Pic.: WSK 40




Pic.: WSK 65


Pressure Drops WSK 10 - 12 / WSK S 16

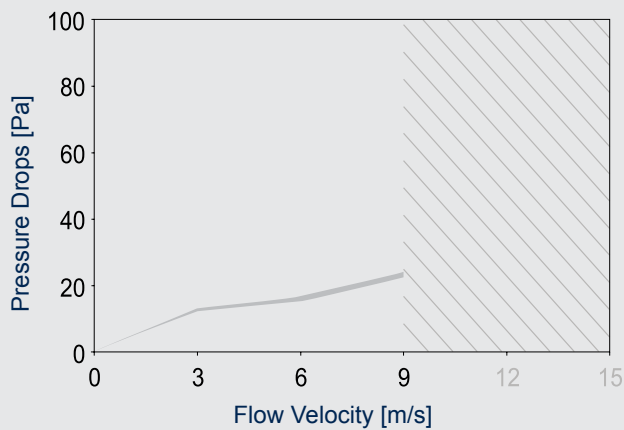

Pressure Drops WSK 15 - 50

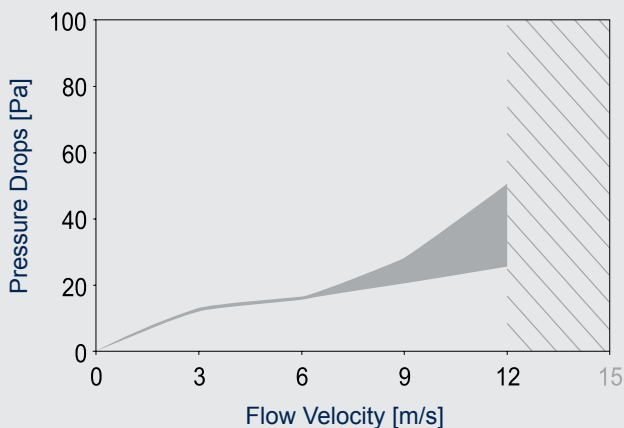

Pressure Drops WSK 55 - 110

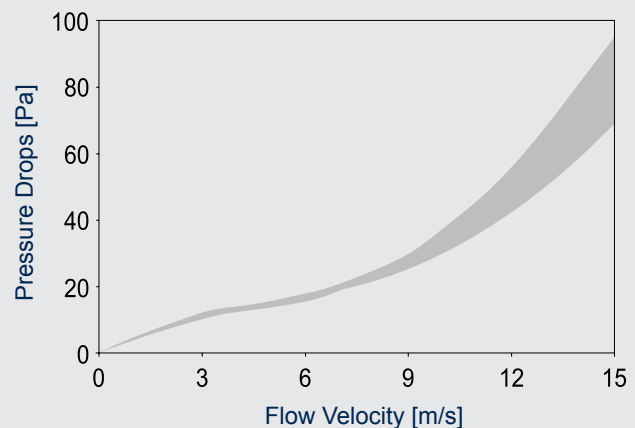


- Each louvre shutter is individually carton-packed incl. a set of fastening parts (hole size 5 mm) except: WSK 12 / WSK S 16
- Available as special fabrication (WSK- S) in all sizes




# Fan Louvre Shutters


## Automatic Version / Type WSK

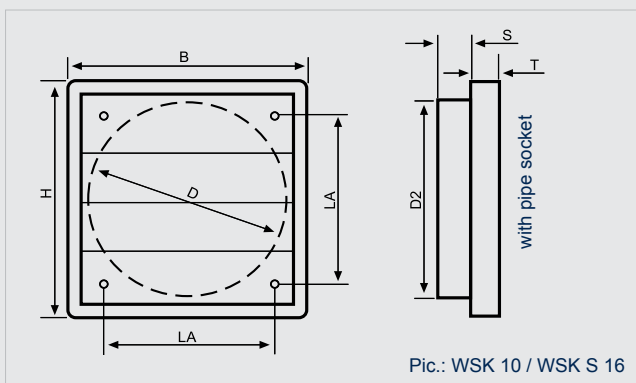


Pic.: WSK 10 / WSK S 16

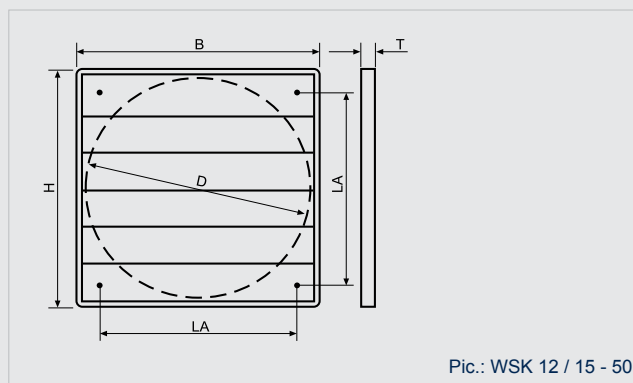

Pic.: WSK 12 / 15 - 50

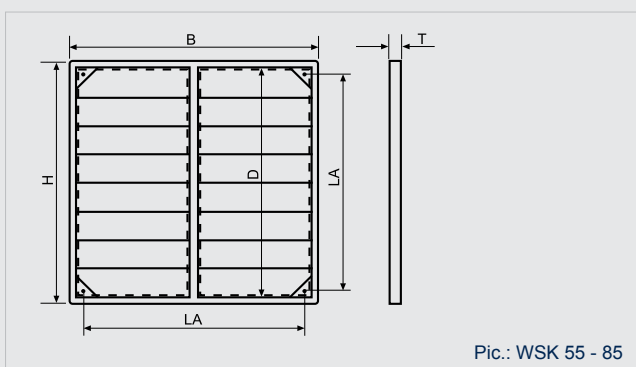

Pic.: WSK 55 - 85

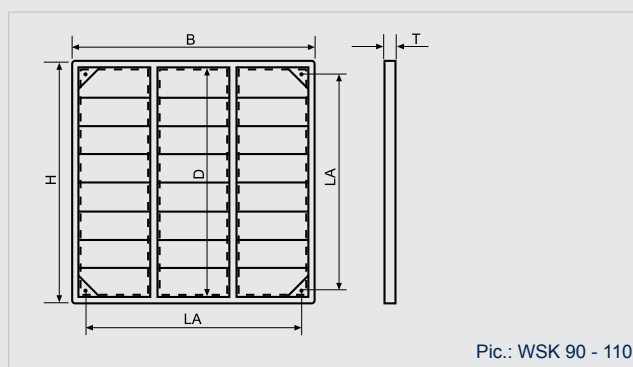

Pic.: WSK 90 - 110

Type	Article-No.			D	H/B	LA	T	S	D2
	grey	light grey	white						
WSK 10	-	-	20000000	93	123	90	12	13	98
WSK 12	20000010	20000011	20000012	129	160	110	15	-	-
WSK S 16	20000022	20000021	20000020	147	180	130	20	25	152

Type	Article-No.			D	H/B	LA	T	Qty./ Box
	grey	light grey	white					
WSK 15	20000030	20000031	20000035	159	195	140	22	10
WSK 20	20000040	20000041	20000045	210	243	182	21	10
WSK 25	20000050	20000051	20000055	258	294	232	26	10
WSK 30	20000060	20000061	20000065	310	346	276	26	10
WSK 35	20000070	20000071	20000075	360	397	310	26	10
WSK 40	20000080	20000081	20000085	422	462	366	26	10
WSK 45	20000090	20000091	20000095	462	501	395	31	10
WSK 50	20000100	20000101	20000105	505	548	443	31	10
WSK 55	20000110	20000111	20000112	563	603	520	28	10
WSK 65	20000120	20000121	20000124	655	696	628	31	10
WSK 70	20000200	20000201	-	700	740	672	40	1
WSK 71	20000202	20000203	-	720	760	692	40	1
WSK 75	20000204	20000205	-	750	790	722	40	1
WSK 80	20000206	20000207	-	800	840	772	40	1
WSK 85	20000208	20000209	-	850	890	822	40	1
WSK 90	20000210	20000211	-	900	940	872	40	1
WSK 95	20000212	20000213	-	950	990	922	40	1
WSK 100	20000214	20000215	-	1000	1040	972	40	1
WSK 110	20000216	20000305	-	1100	1140	1072	40	1

Dimensions in mm. Subject to technical changes.

white ~ RAL 9010 / light grey ~ RAL 7035 / grey ~ RAL 7001



Klimatechnik Weiss GmbH • Krefelder Str. 670 • 41066 Mönchengladbach • Germany  
 Fon +49 2161 990 900 • Fax +49 2161 990 9099 • office@ktweiss.de • www.ktweiss.de

