




Type: **R 200 G.3BK**
Part no.: F02-20000



Curve:

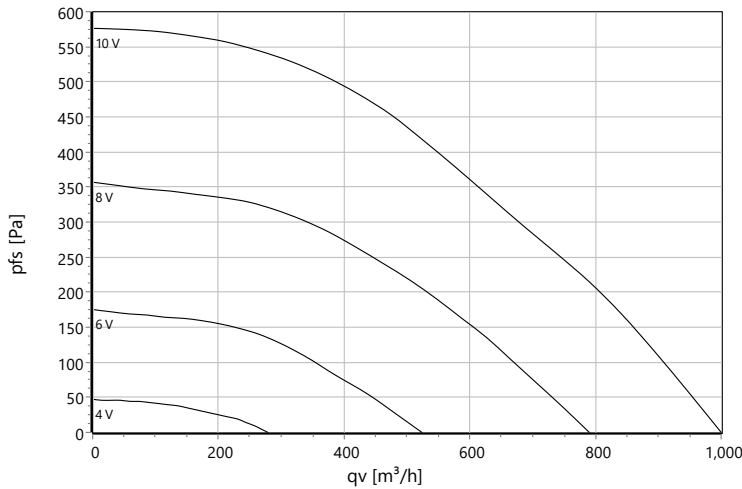

p: 1.15 kg/m³; Data @ 230 V

ErP-Data:

(EU) Nr. 1253/2014	(Lot6)
q _v	542 m³/h
p _{is}	424 Pa
η _{fs}	41 %
P _{ed}	0.156 kW
n	3169 r/min
N	53
v	4.80 m/s
η _{fs} Lot11	54.1 %


Nominal Data:

U [V]	f [Hz]	Data @ [V]	P _{ed} [kW]	I _N [A]	n _N [r/min]	t _r [°C]	k ₁₀ [m²/s/h]	I _A / I _N	IP	m [kg]
1~200-240	50/60	230	0.16	1.1	3200	-20 .. +50	-	-	IP 44	3.9

Sound Data:

Frequency	Σ	125Hz	250Hz	500Hz	1kHz	2kHz	4kHz	8kHz	Distances	1 m	3 m
LwA(D,in) [dB(A)]	2	-15	-6	-5	-5	-3	-9	-19	LpA(D,in) [dB(A)]	-5	-12
LwA(D,out) [dB(A)]		-18	-10	-9	-7	-4	-9	-17	LpA(D,out) [dB(A)]	-7	-14
LwA(D,cas) [dB(A)]	-17	-32	-27	-25	-24	-22	-25	-38	LpA(D,cas) [dB(A)]	-24	-31

Wiring Diagram:

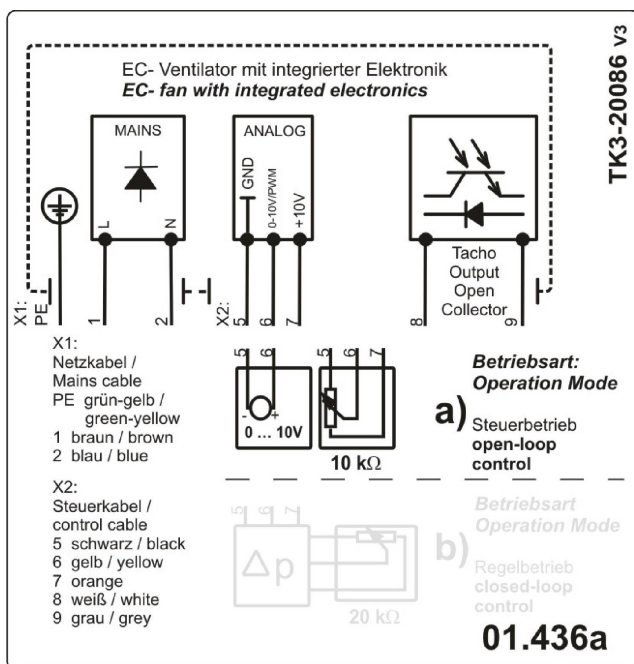

drawing:

